


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9274COLOR  
INSULATOR: MOLDED PVC. AVAILABLE IN TEN COLORS.  
ALLIGATOR: NICKEL PLATED STEEL.
2. P/N: W-600/COLOR  
18AWG TINNED COPPER  
0.144 [3.66] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.
3. PERFORMANCE  
MAXIMUM CURRENT: 4.0 AMPS  
MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC  
HANDS FREE: 5000 W.V.D.C  
MAXIMUM TEMPERATURE: 200°F (93°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

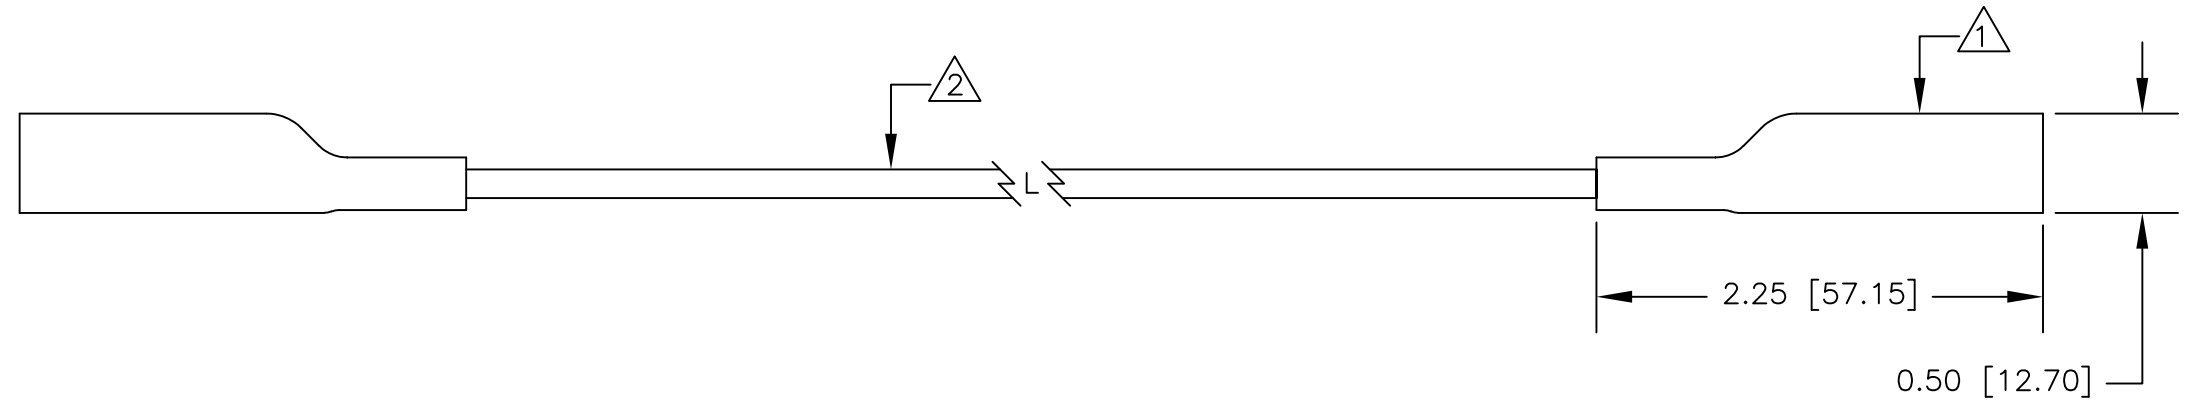

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
			APPROVALS	DATE		
		MATERIAL SEE NOTE.	DRAWN	R.L.	8/16	
			APPROVED BY			
		FINISH SEE NOTE.			DESCRIPTION	
					STD ALLIGATOR CLIP (9274) JUMPER	
NEXT ASSY	USED ON		SIZE	CODE IDENT NO.	DRAWING NO.	REV.
			<b>B</b>	<b>08505</b>	684	
APPLICATION		DO NOT SCALE DRAWING	SCALE		1:1	SHEET 1 OF 1